


# R4T SERIES



Connecting piece capable of gap minimizer

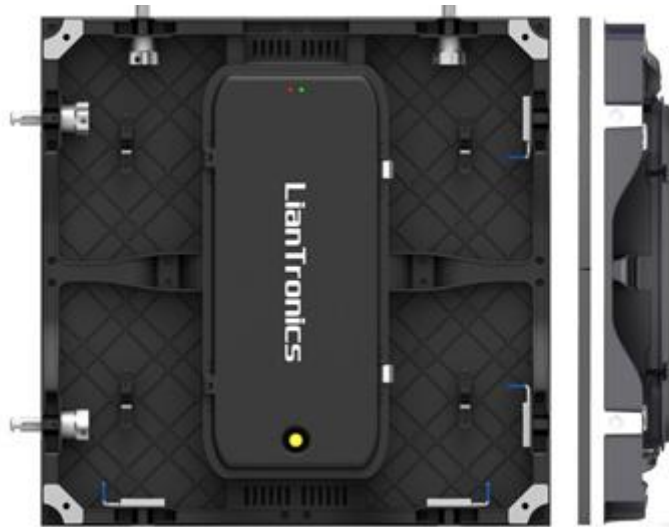

Integrated handle design



No tool needed during installation



Easy-to-grip module



Self-inspection function



High protection grade guarantees stable operation during use



8.5kg for R4T  
9kg for R7



Light Weight



Easy Maintenance



WIDE VIEW



Fast Installation



FRESHCOLOR



Slimness

<b>Specification</b>	<b>Value</b>
Pixel Pitch(mm)	4.8 mm
Pixel Density	43264
Pixel Configuration	SMD 3 in 1
Brightness(nits)	>5500 nits
Viewing Angle(H/V)	140(H)/100(V)
Grey level(bit)	14/16
Refresh Rate(Hz)	≥1920
Module Size(WxH)(mm)	250mm(W) x 250mm(H)
Module Resolution(pixels)	52x52
Panel Dimension (W*L)(mm)	500(W)x500(L)
Panel Dimension(W*L)(inch)	19.69(W)x19.69(L)
Panel Resolution(pixels)	104x104
Panel Type and Material	Die-casting aluminum
Panel Weight(kg)	8.5
Max. Hanging Panel Quantity(vertical)	20
Voltage	AC 100/240
Avg.Power Consumption(W/m <sup>2</sup> )	230
Max.Power Consumption(W/m <sup>2</sup> )	690
Serviceability	Rear
Protecton grade(Rear/Front)	IP65/IP54
Operating Temp/Humidity(°C/%RH)	-20~+40C/ 10~90
Storage Temp/Humidity(°C/%RH)	-40~+60C/ 0-90
Lifetime(hours)	50,000 hrs
Compliant Standards	CE, FCC, RoHS, TUV-CE